


PTFE KOMPENZÁTORY 2-VLNOVCOVÉ


DIN	ANSI	DN S ± 10% mm	L mm	zdvih ± mm	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> max mm	angulárna uhlová výchylka max.°	hmotnosť kg	vákuová odolnosť	
								10 ⁴ Pa	max. °C
015	1/2"	2,5	28	4	2	7	1	0,1	200
020	3/4"	3	28	4	2	7	2	0,1	200
025	1"	3,5	35	6	3	7	2	0,1	200
032	1 1/4"	3,5	35	6	3	7	2	0,1	200
040	1 1/2"	4	35	6	3	7	3	0,1	200
050	2"	4	40	6	3	7	4	0,1	200
065	2 1/2"	4	57	9	5	7	4	0,1	200
080	3"	4,5	57	9	5	7	5	0,1	200
100	4"	4,5	67	13	6	7	7	0,1	200
125	5"	4,5	83	13	6	7	11	0,1	150
150	6"	5	75	13	6	7	12	0,1	150
200	8"	5	102	13	6	7	20	0,1	50
								2,0	150
250	10"	5,5	140	15	6	7	25	0,7	45
								3,4	100
300	12"	6,5	150	20	10	7	32	1,5	45
								6,7	100
350	14"	6,5	160	20	10	7	54	1,5	45
								6,7	100
400	16"	6,5	178	25	10	7	68	1,5	45
								6,7	100
450	18"	6,5	185	25	10	7	79	3,4	45
								7,0	100
500	20"	6,5	230	25	10	7	82	8,0	100
								8,7	100

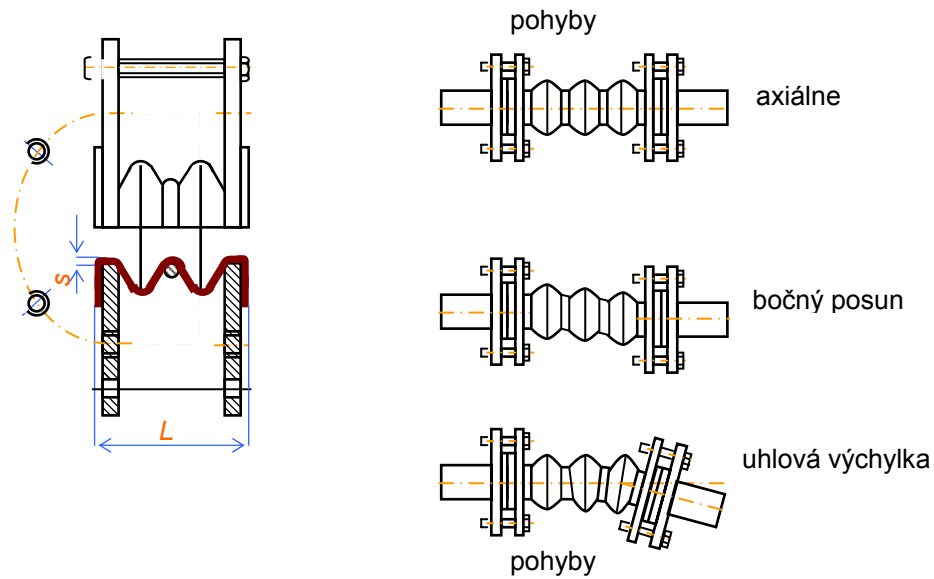