


**PTFE KOMPENZÁTORY 3-VLNOVCOVÉ**


DN		S ± 10% mm	L mm	zdvih ± mm	presadenie stredu max mm	angulárna uhlová výchylka max.°	hmotnosť kg	vákuová odolnosť	
DIN	ANSI							10 <sup>4</sup> Pa	max. °C
015	1/2"	2,5	37	6	4	14	1	0,1	200
020	3/4"	3	37	6	4	14	2	0,1	200
025	1"	3,5	46	13	6	14	2	0,1	200
032	1 1/4"	3,5	46	13	6	14	2	0,1	200
040	1 1/2"	4	50	13	6	14	3	0,1	200
050	2"	4	56	15	9	14	4	0,1	200
065	2 1/2"	4	77	19	9	14	5	0,1	200
080	3"	4,5	77	25	13	14	5	0,1	200
100	4"	4,5	91	25	13	14	7	0,1	200
125	5"	4,5	111	25	14	14	11	0,1	150
150	6"	5	101	28	14	14	13	0,1	150
200	8"	5	137	28	14	14	21	0,1	50
								2,0	150
250	10"	5,5	200	30	14	14	26	0,7	45
								3,4	100
								1,5	45
300	12"	6,5	196	30	15	14	34	6,7	100
								1,5	45
350	14"	6,5	215	32	18	14	58	6,7	100
								1,5	45
400	16"	6,5	233	35	20	14	73	1,5	45
								6,7	100
450	18"	6,5	280	30	20	14	89	3,4	45
								7,0	100
500	20"	6,5	327	30	25	14	102	-	-
								8,0	100

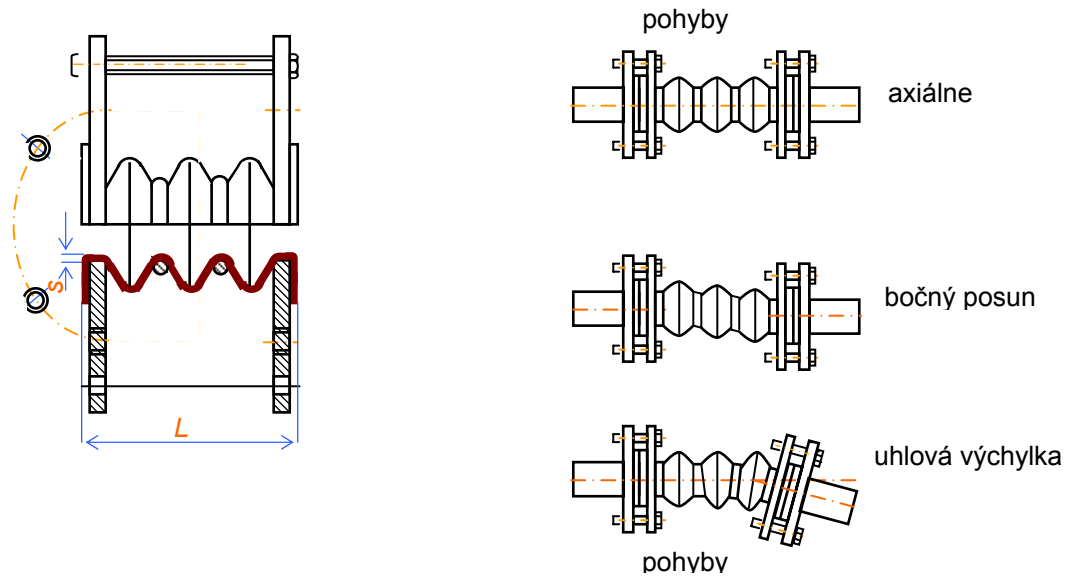