
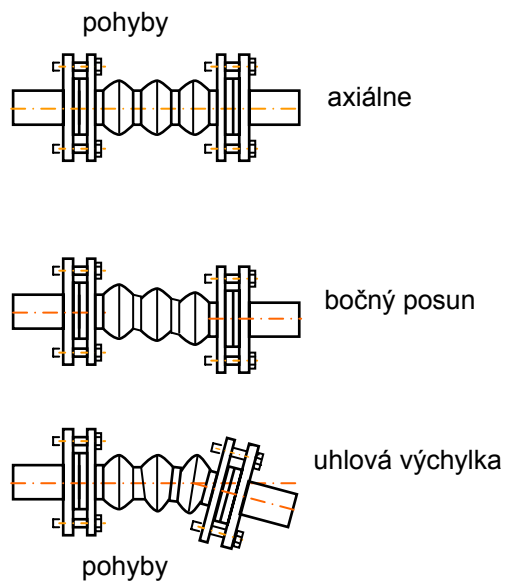


**PTFE KOMPENZÁTORY 5-VLNOVCOVÉ**


DN		S ± 10% mm	L mm	zdvih ± mm	presadenie stredu max mm	angulárna uhlová výchylka max. °	hmotnosť kg
DIN	ANSI						
015	1/2"	2,5	55	8	5	20	1
020	3/4"	3	55	8	5	20	2
025	1"	3,5	68	8	12	20	2
032	1 1/4"	3,5	68	8	12	20	2
040	1 1/2"	4	80	13	12	20	3
050	2"	4	88	19	12	20	4
065	2 1/2"	4	113	25	13	20	5
080	3"	4,5	113	25	16	20	5
100	4"	4,5	139	25	16	20	7
125	5"	4,5	167	32	16	20	12
150	6"	5	153	32	16	20	14
200	8"	5	207	32	16	20	21
250	10"	5,5	300	32	16	20	28
300	12"	6,5	288	35	18	20	39
350	14"	6,5	325	35	18	20	62
400	16"	6,5	343	40	25	20	78
450	18"	6,5	470	40	25	20	93
500	20"	6,5	520	40	25	20	108

Nedoporučujú sa do vákuového prostredia.

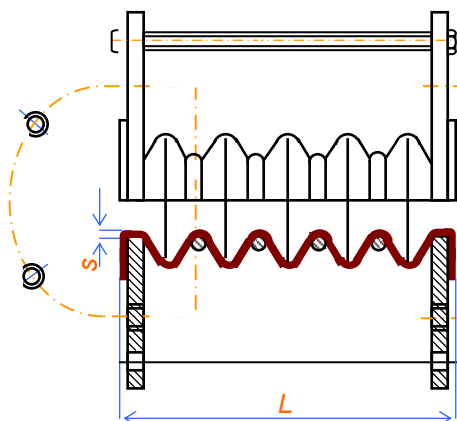